





The structure of the Earth

The Crust	Varies in thickness (5-10km) beneath the ocean. Made up of several large plates.
The Mantle	Widest layer (2900km thick). The heat and pressure means the rock is in a liquid state that is in a state of convection.
The Inner and outer Core	Hottest section (5000 degrees). Mostly made of iron and nickel and is 4x denser than the crust. Inner section is solid whereas outer layer is liquid.

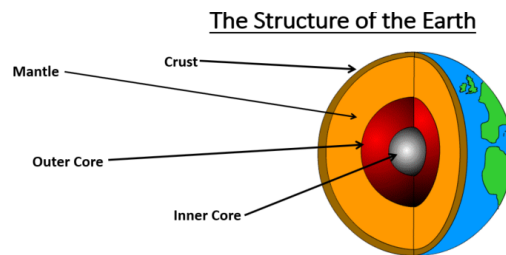


YEAR 9

WILD WORLD

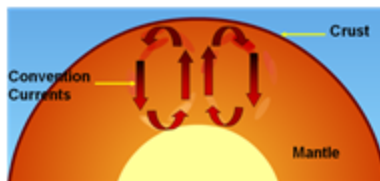

Volcanic Hazards

Ash cloud	Small pieces of pulverised rock and glass which are thrown into the atmosphere.
Gas	Sulphur dioxide, water vapour and carbon dioxide come out of the volcano.
Lahar	A volcanic mudflow which usually runs down a valley side on the volcano.
Pyroclastic flow	A fast moving current of super-heated gas and ash (1000°C). They travel at 450mph.
Volcanic bomb	A thick (viscous) lava fragment that is ejected from the volcano.

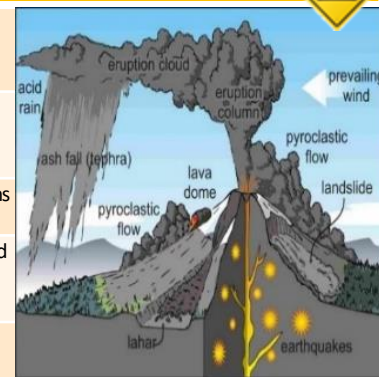

Convection Currents

The crust is divided into tectonic plates which are moving due to convection currents in the mantle.

- 1 Radioactive decay of some of the elements in the core and mantle generate a lot of heat.
- 2 When lower parts of the mantle molten rock (Magma) heat up they become less dense and slowly rise.
- 3 As they move towards the top they cool down, become more dense and slowly sink.
- 4 These circular movements of semi-molten rock are convection currents
- 5 Convection currents create drag on the base of the tectonic plates and this causes them to move.


Managing Volcanic Eruptions

Warning signs	Monitoring techniques
Small earthquakes are caused as magma rises up.	Seismometers are used to detect earthquakes.
Temperatures around the volcano rise as activity increases.	Thermal imaging and satellite cameras can be used to detect heat around a volcano.
When a volcano is close to erupting it starts to release gases.	Gas samples may be taken and chemical sensors used to measure sulphur levels.
Preparation	
Creating an exclusion zone around the volcano.	Being ready and able to evacuate residents.
Having an emergency supply of basic provisions, such as food	Trained emergency services and a good communication system.

Types of Plate Margins

Destructive Plate Margin

When the denser plate subducts beneath the other, friction causes it to melt and become molten magma. The magma forces its way up to the surface to form a volcano. This margin is also responsible for devastating earthquakes.




Constructive Plate Margin

Here two plates are moving apart causing new magma to reach the surface through the gap. Volcanoes formed along this crack cause a submarine mountain range such as those in the Mid Atlantic Ridge.



Conservative Plate Margin

A conservative plate boundary occurs where plates slide past each other in opposite directions, or in the same direction but at different speeds. This is responsible for earthquakes such as the ones happening along the San Andreas Fault, USA.



What is a Natural Hazard

A natural hazard is a natural process which could cause death, injury or disruption to humans, property and possessions.

Geological Hazard	Meteorological Hazard
These are hazards caused by land and tectonic processes.	These are hazards caused by weather and climate.


Causes of Earthquakes

Earthquakes are caused when two plates become locked causing friction to build up. From this stress, the pressure will eventually be released, triggering the plates to move into a new position. This movement causes energy in the form of seismic waves, to travel from the focus towards the epicentre. As a result, the crust vibrates triggering an earthquake.

The point directly above the focus, where the seismic waves reach first, is called the **EPICENTRE**.

SEISMIC WAVES (energy waves) travel out from the focus.

The point at which pressure is released is called the **FOCUS**.



Earthquake Management

PREDICTING

Methods include:


- Satellite surveying (tracks changes in the earth's surface)
- Laser reflector (surveys movement across fault lines)
- Seismometer
- Scientists also use seismic records to predict when the next event will occur.

PROTECTION

You can't stop earthquakes, so earthquake-prone regions follow these three methods to reduce potential damage:

- Building earthquake-resistant buildings
- Raising public awareness
- Improving earthquake prediction

HIC CASE STUDY

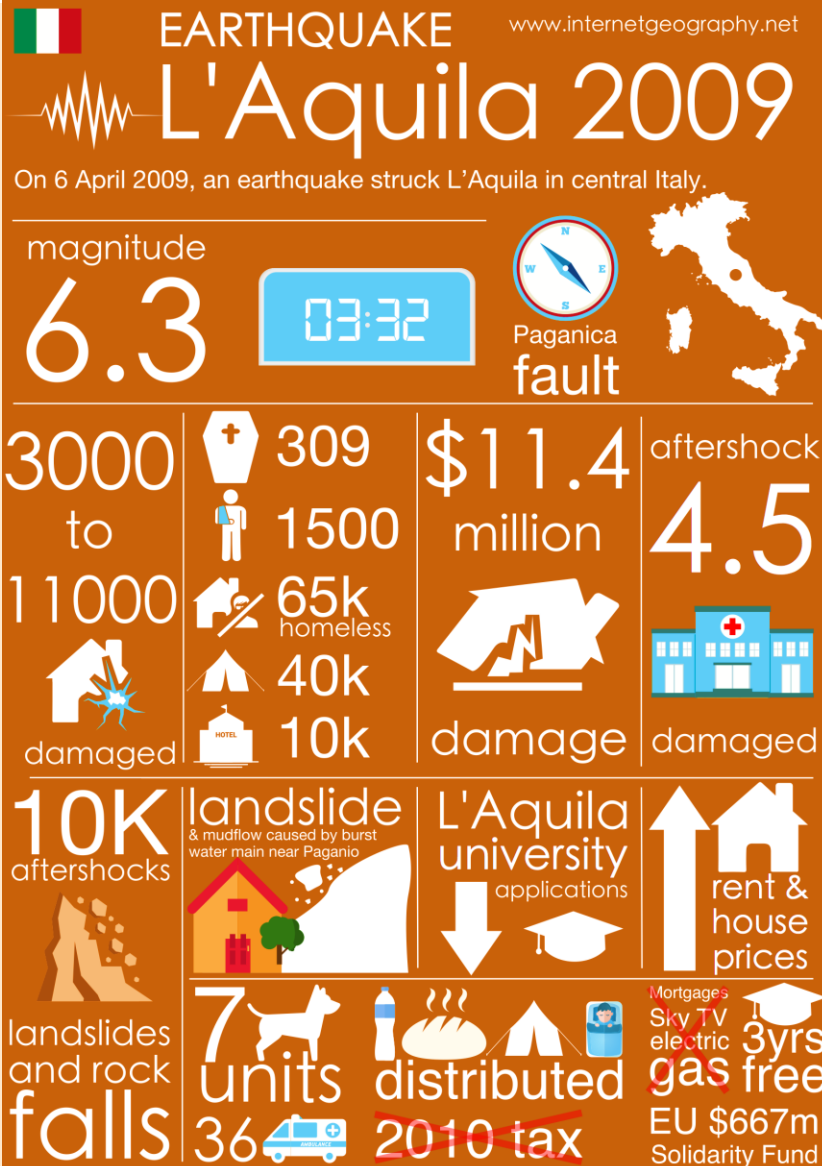

LIC CASE STUDY

